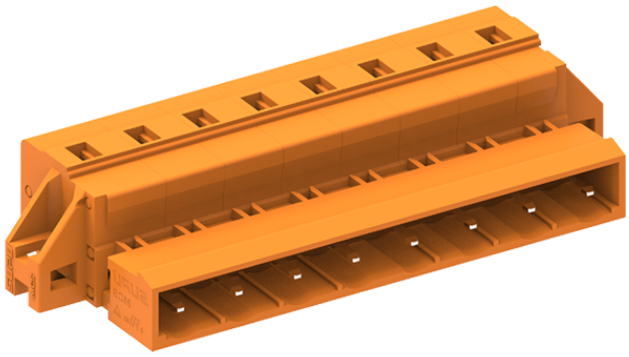

Product Type: Plug-in terminal-Socket

# Product Name:478403-010

Product Description: Pitch:7.62mm Rated Voltage：630V Rated Current:16A Connection method：Spring cage connection colour：orange

## Product Size

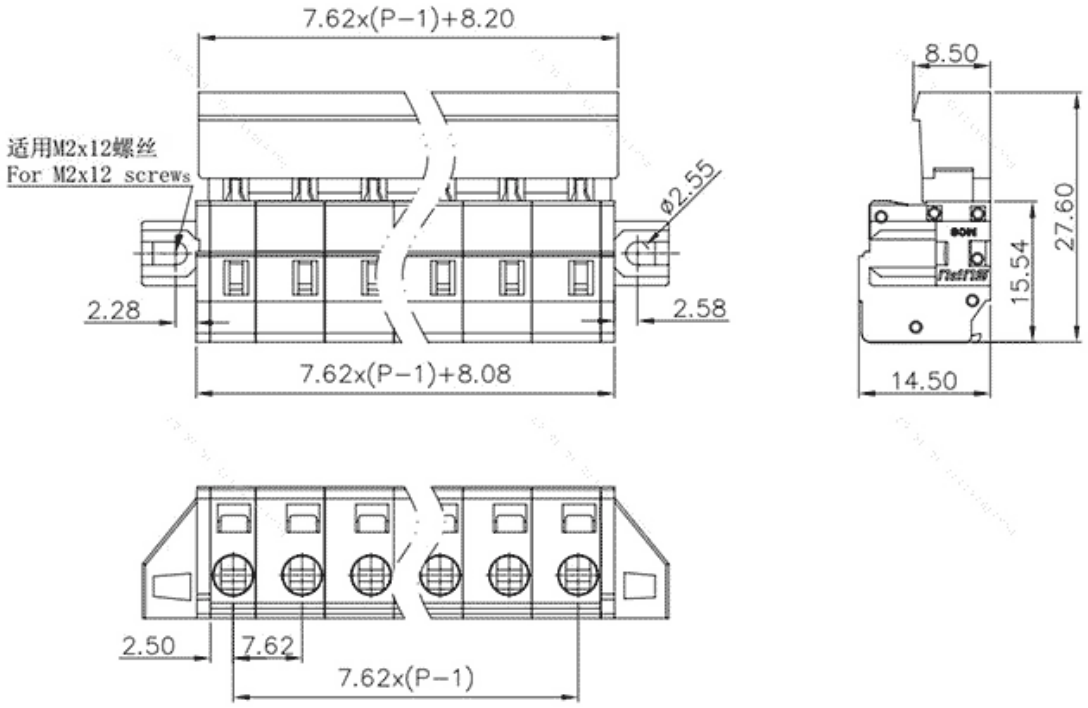


## Parameters

| | |
|---|---|
| SUPU ID | 478403-010 |
| Pitch | 7.62 |
| Number of connections | 3 |
| Connection method | - |

| | |
|---|---|
| Protection Level | IP20 |
| Operating temperature range | -40~+105°C |
| Insulation material | PA66 |
| Insulation material group | I |
| Contact material | Copper alloy |
| Contact plating | Sn,Plated |
| Color | Orange |

## Technical data

| | |
|---|---|
| IEC Rated Current | 630V |
| IEC Rated Voltage | 16A |
| Overvoltage category | III III II |
| Degree of pollution | 3 2 2 |
| Rated impulse voltage | 6.0KV 6.0KV 6.0KV |
| UL Rated Current | 15A 15A - |
| UL Rated Voltage | 300V 300V - |
| Conductor cross section rigid | 0.2-2.5mm² |
| Conductor cross section flexible | 0.2-2.5mm² |
| Conductor cross section flexible,with furrule | 0.2-2.5mm² |
| Locking screw Specification | - |
| Locking screw torque | - |
| Fixed Screw Specification | - |
| Stripping length | 8-9mm |
| Use group | B/C/D |

## Commercial data

| Order No | 478403-010 |
| --- | --- |


### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

Wechat



The right to modify data belongs to SUPU.