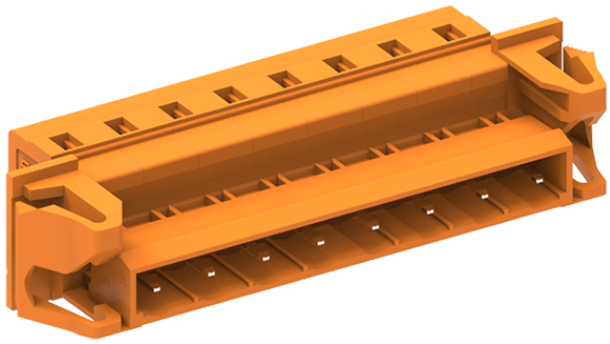

Product Type: Plug-in terminal-Socket

Product Name:478412-060

Product Description: Pitch:7.62mm Rated Voltage：630V Rated Current:16A Connection method：Spring cage connection colour：orange

Product Size

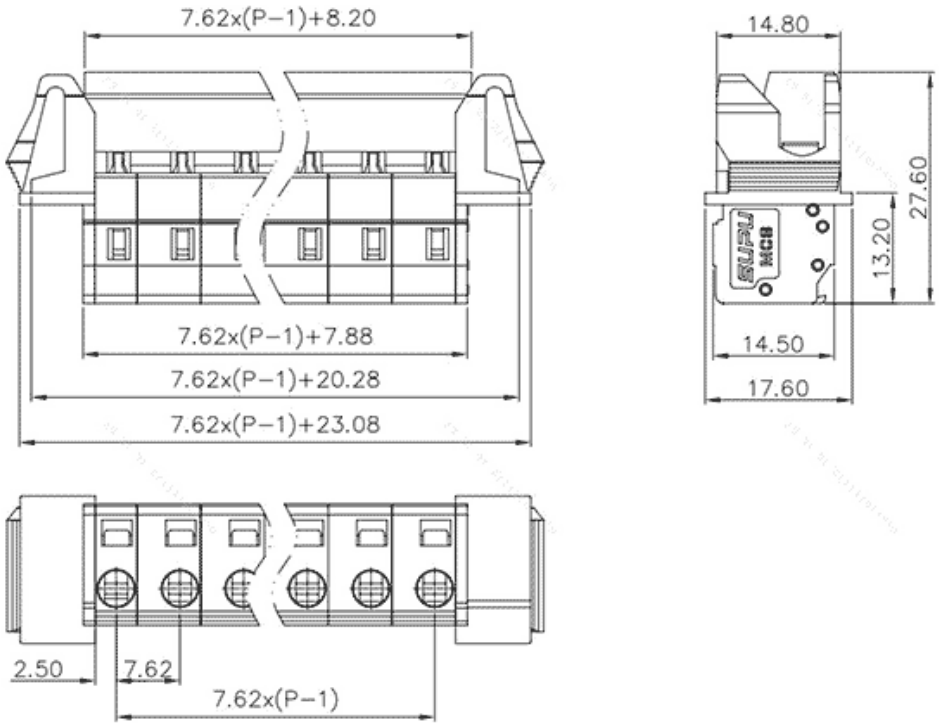

Parameters

SUPU ID	478412-060
Pitch	7.62
Number of connections	12
Connection method	-

Protection Level	IP20
Operating temperature range	-40~+105°C
Insulation material	PA66
Insulation material group	I
Contact material	Copper alloy
Contact plating	Sn,Plated
Color	Orange

Technical data

IEC Rated Current	630V
IEC Rated Voltage	16A
Overvoltage category	III III II
Degree of pollution	3 2 2
Rated impulse voltage	6.0KV 6.0KV 6.0KV
UL Rated Current	15A 15A -
UL Rated Voltage	300V 300V -
Conductor cross section rigid	0.2-2.5mm²
Conductor cross section flexible	0.2-2.5mm²
Conductor cross section flexible,with furrule	0.2-2.5mm²
Locking screw Specification	-
Locking screw torque	-
Fixed Screw Specification	-
Stripping length	8-9mm
Use group	B/C/D

Commercial data

Order No	478412-060

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

Wechat

The right to modify data belongs to SUPU.