


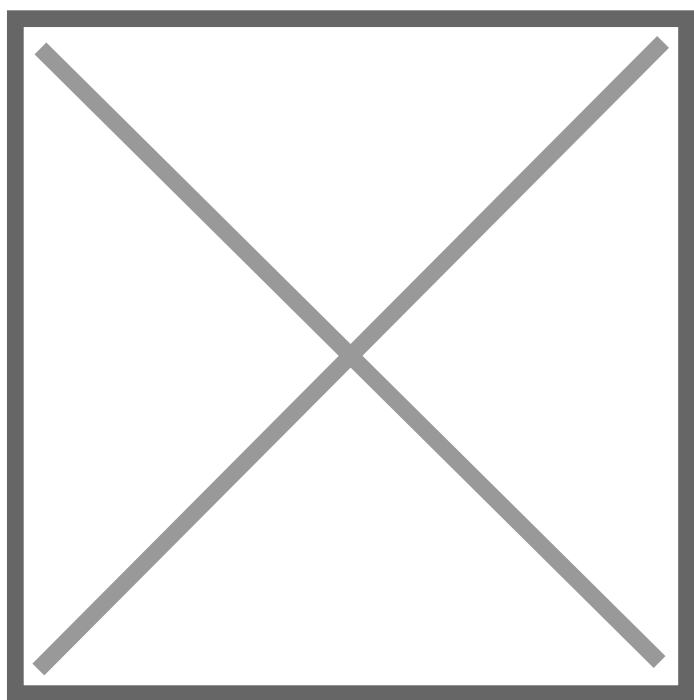

Product Type: Plug-in terminal-Socket


Product Name:MC-DPA5.0H30-F-0002

Product Description: Pitch:5.0mm Rated

Voltage : 320V Rated Current:10A

colour : customizable

Product Size

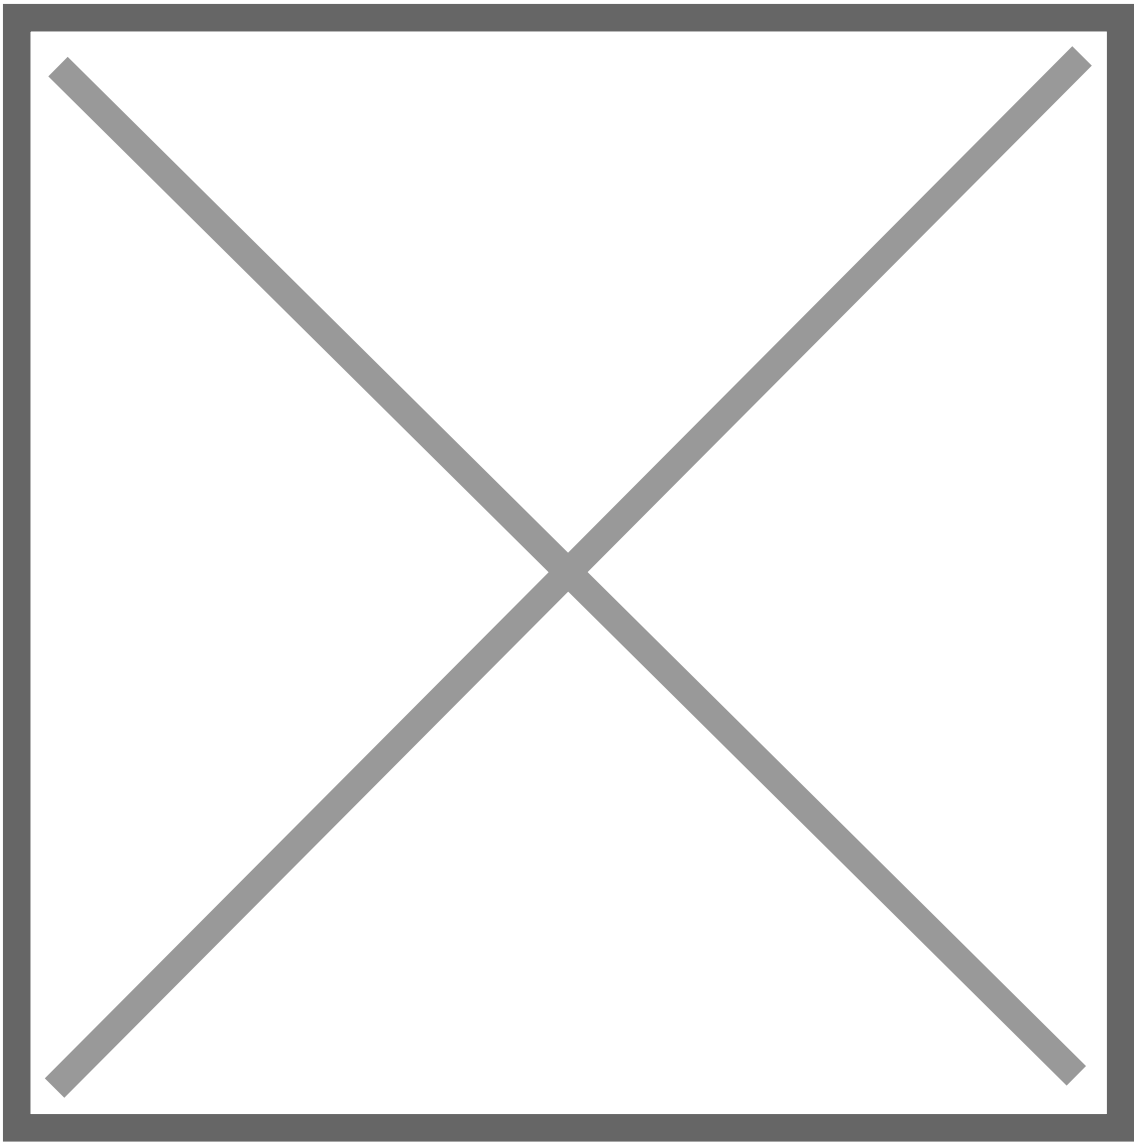

Parameters

|                               |                     |            |
|-------------------------------|---------------------|------------|
| ⌘ SUPU ID                     | MC-DPA5.0H30-F-0002 |            |
| ⌘ Pitch                       |                     | 5.0        |
| ⌘ Number of connections       |                     | 30         |
| ⌘ Connection method           |                     | -          |
| ⌘ Protection Level            |                     | IP20       |
| ⌘ Operating temperature range |                     | -40~+105°C |
| ⌘ Insulation material         |                     | PA66       |
| ⌘ Insulation material group   |                     | I          |

|                    |                                  |
|--------------------|----------------------------------|
| ☞ Contact material | Copper alloy                     |
| ☞ Contact plating  | Sn,Plated                        |
| ☞ Color            | Green/Black/Blue/Grey/Orange/Red |

## Technical data

|                                                 |                   |
|-------------------------------------------------|-------------------|
| ☞ IEC Rated Current                             | 320V              |
| ☞ IEC Rated Voltage                             | 10A               |
| ☞ Overvoltage category                          | III III II        |
| ☞ Degree of pollution                           | 3 2 2             |
| ☞ Rated impulse voltage                         | 4.0KV 4.0KV 4.0KV |
| ☞ UL Rated Current                              | 15A - 10A         |
| ☞ UL Rated Voltage                              | 300V - 300V       |
| ☞ Conductor cross section rigid                 | -                 |
| ☞ Conductor cross section flexible              | -                 |
| ☞ Conductor cross section flexible,with furrule | -                 |
| ☞ Locking screw Specification                   | -                 |
| ☞ Locking screw torque                          | -                 |
| ☞ Fixed Screw Specification                     | -                 |
| ☞ Stripping length                              | -                 |
| ☞ Use group                                     | B/C/D             |

## Commercial data

|            |                     |
|------------|---------------------|
| ☞ Order No | MC-DPA5.0H30-F-0002 |
|------------|---------------------|

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

---

Date:2025-08-19 16:45

The right to modify data belongs to SUPU.