




Product Type: Terminal block

Product Name: X2-P08R-LU

Product Description: 50mm ordinary base, MC-DTP/TP terminal input, MC-RJ in-line Terminal 8 outputs, with status indicator high and low level switching input.

Product Size

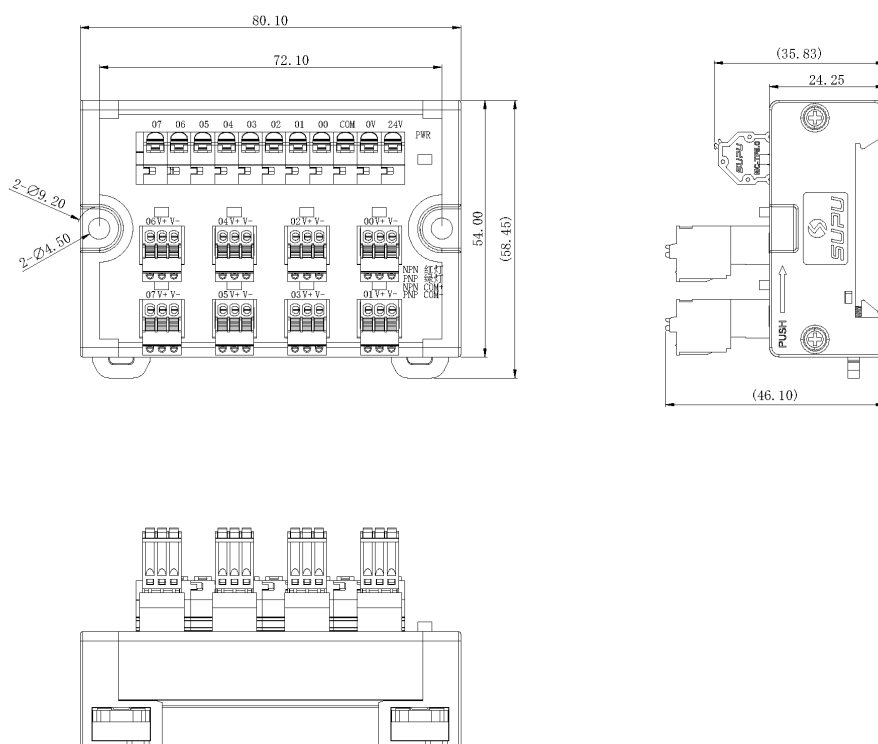

Parameters

 SUPU ID	X2-P08R-LU
 Number of connections	8
 Protection Level	IP20

⌘ Operating temperature range	-20°C-+70°C
-------------------------------	-------------

⌘ Mounting Type	35mm DIN/screw mounting
-----------------	-------------------------

Technical data

⌘ Overvoltage category	II
------------------------	----

⌘ Degree of pollution	2
-----------------------	---

⌘ Stripping length	9-10mm
--------------------	--------

⌘ Cable cross section (AWG)	500VAC/1min
-----------------------------	-------------

⌘ Insulation Resistance	500MΩ
-------------------------	-------

⌘ Wire Range	28-16AWG
--------------	----------

⌘ Coil Current	/
----------------	---

⌘ Load Current	1A
----------------	----

⌘ Coil Voltage	/
----------------	---

Commercial data

⌘ Order No	X2-P08R-LU
------------	------------

⌘ Packing unit	PCS
----------------	-----

⌘ Minimum order quantity	5
--------------------------	---

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Ningbo SUPU Electronics Co., Ltd.

Service Hotline: 400-626-6336



Wechat

Date:2025-10-27 23:17

The right to modify data belongs to SUPU.