


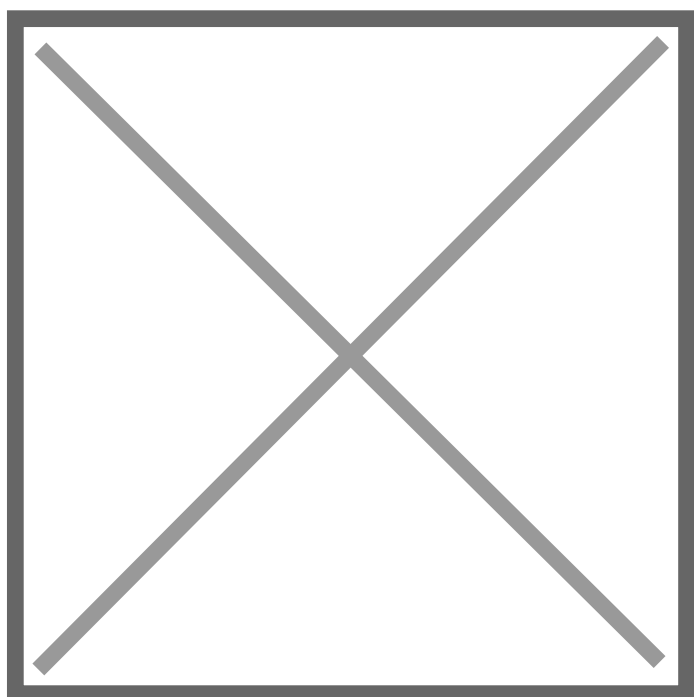


Product Type: Plug-in terminal-Plug

Product Name:MC-
RHH10.16H08C-0001

Product Description: Pitch:10.16mm Rated
Voltage : 1000V Rated Current:76A Connection
method : Screw connection colour : customizable

Product Size

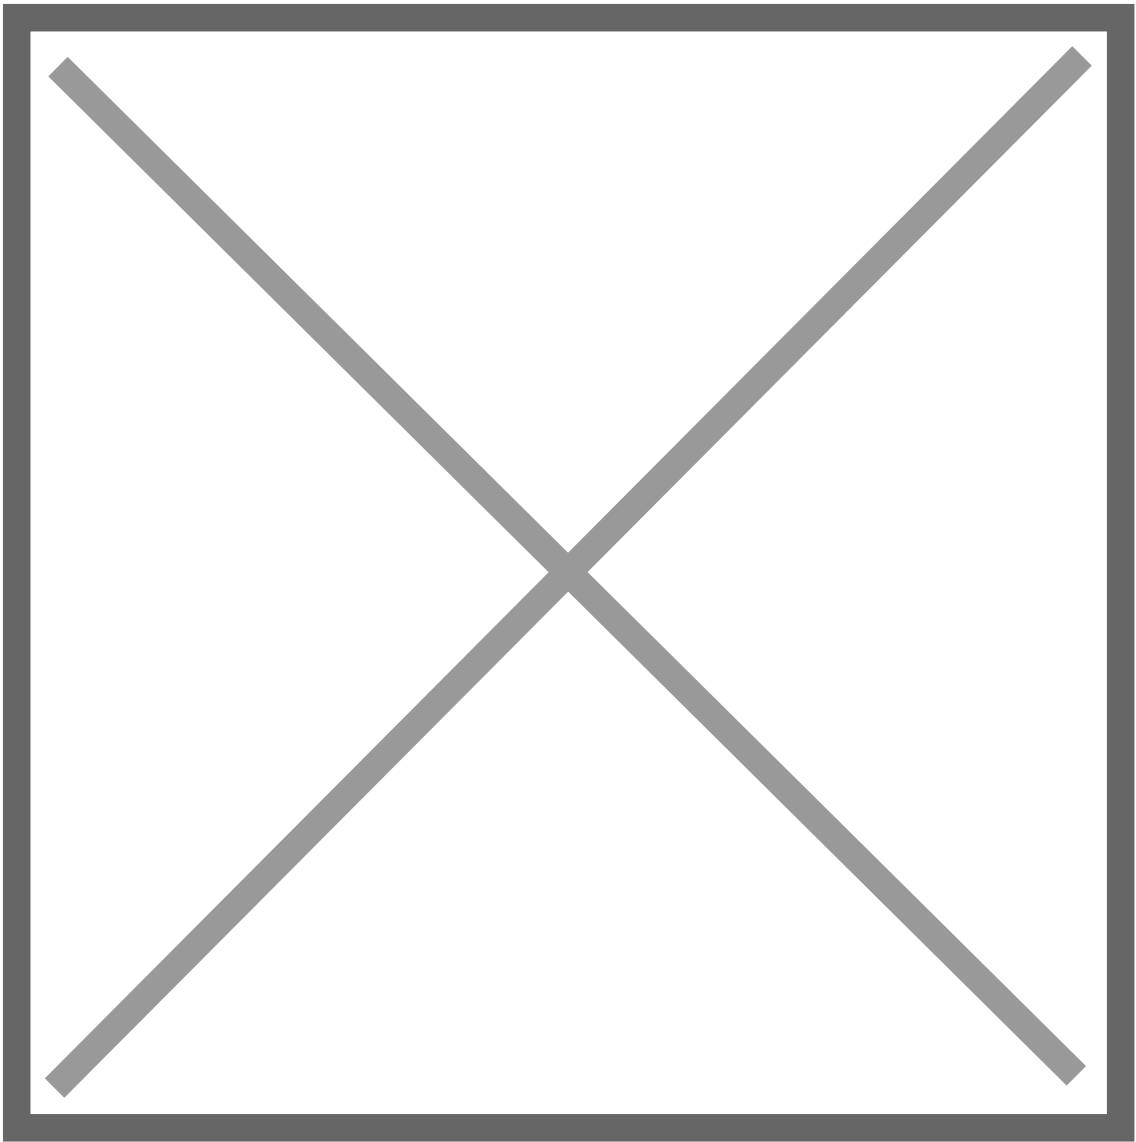

Parameters

⌘ SUPU ID	MC-RHH10.16H08C-0001	
⌘ Pitch		10.16
⌘ Number of connections		8
⌘ Connection method	Screw connection	
⌘ Protection Level		IP20
⌘ Operating temperature range	-40~+105°C	
⌘ Insulation material	PA66	
⌘ Insulation material group		I

☞ Contact material	Copper alloy
☞ Contact plating	Sn,Plated
☞ Color	Green/Black/Blue/Grey/Orange/Red

Technical data

☞ IEC Rated Current	76A
☞ IEC Rated Voltage	1000V
☞ Overvoltage category	III/III/ II
☞ Degree of pollution	3 2 2
☞ Rated impulse voltage	8.0KV 8.0KV8.0KV
☞ UL Rated Current	55A 55A -
☞ UL Rated Voltage	600V 600V -
☞ Conductor cross section rigid	0.5-16mm ²
☞ Conductor cross section flexible	0.5-16mm ²
☞ Conductor cross section flexible,with furrule	0.5-16mm ²
☞ Locking screw Specification	M4
☞ Locking screw torque	1.2N.m
☞ Fixed Screw Specification	-
☞ Stripping length	12mm
☞ Use group	B/C/D

Commercial data

☞ Order No	MC-RHH10.16H08C-0001
------------	----------------------

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

Date:2025-08-19 16:45

The right to modify data belongs to SUPU.