




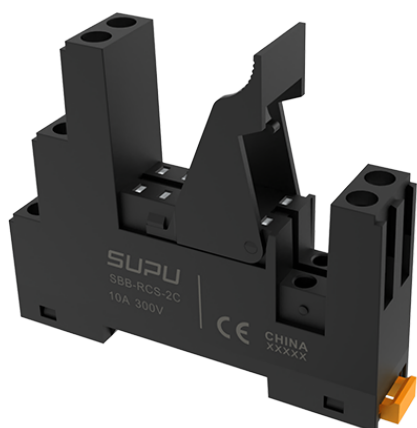


Product Type: PCB welding type intermediate relay

Product Name: SBB-RCS-2C

Product Description: SBB-RCS-2C

Product Size

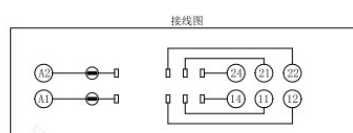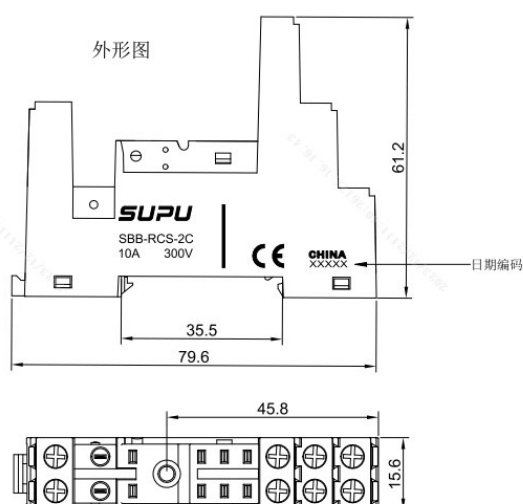

Parameters

 SUPU ID	2C
 Protection Level	10A
 Ambient temperature (operation)	II
 Mounting Type	-40°C~+85°C

☞ Connection method	DIN 35 rail mounting
---------------------	----------------------

☞ Contact connection type	Black
---------------------------	-------

Technical data

☞ IEC Rated Current	300V
---------------------	------

☞ IEC Rated Voltage	Coils to contacts : 4000V/S Contacts to contacts : 2500V/S
---------------------	---

☞ Overvoltage category	2
------------------------	---

☞ Degree of pollution	IP20
-----------------------	------

☞ Stripping length	20-14/0.5-2.5AWG/mm2
--------------------	----------------------

☞ Wire Range	Relay socket
--------------	--------------

☞ Dielectric withstand voltage	1.0Nm
--------------------------------	-------

☞ Screw torque	10-12/0.43Pin
----------------	---------------

Commercial data

☞ Order No	PCS
------------	-----

☞ Packing unit	20
----------------	----

☞ Weight per unit (without packaging)	44
---------------------------------------	----

☞ Single piece weight	PCB Plug-in terminal-Plug SBB-RCS-2C-SUPU Electronic
-----------------------	--

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

Ningbo SUPU Electronics Co., Ltd.

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat

Date:2025-10-28 12:41

The right to modify data belongs to SUPU.