


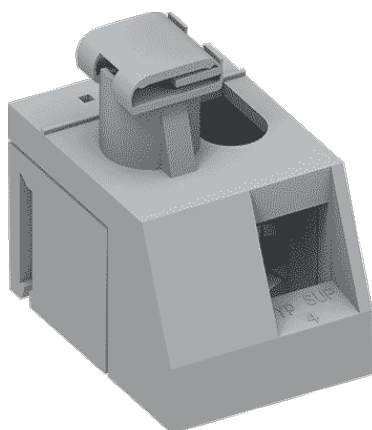


Product Type: Transformer terminal

**Product Name:620152**

Product Description: Pitch: 22mm Rated  
Voltage : 600V Rated Current:10A Connection  
method : Screw connection colour : orange

## Product Size

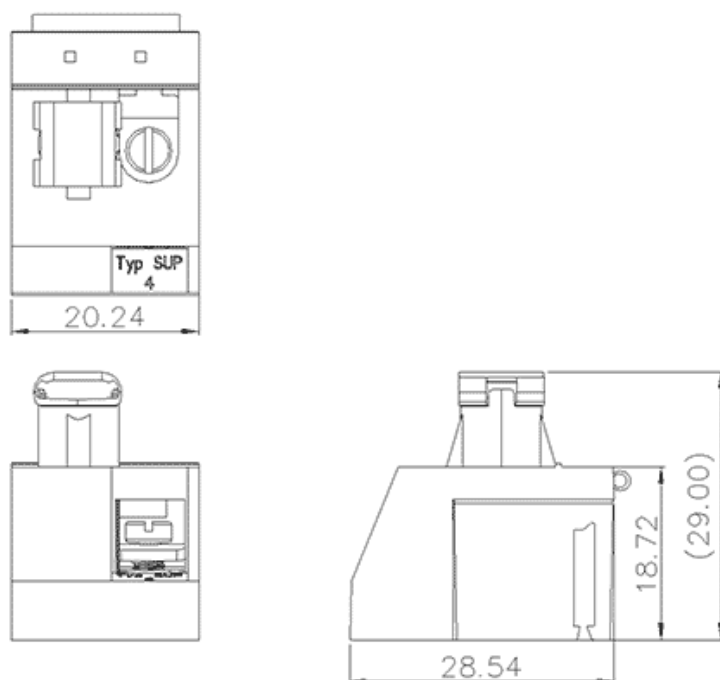

## Parameters

|                                                                                                         |              |
|---------------------------------------------------------------------------------------------------------|--------------|
|  SUPU ID               | 620152       |
|  Pitch                 | 22           |
|  Number of levels      | single layer |
|  Number of connections | 1            |

|                               |                  |
|-------------------------------|------------------|
| ☞ Connection method           | Screw connection |
| ☞ Protection Level            | IP20             |
| ☞ Operating temperature range | -25°C~70°C       |
| ☞ Insulation material         | PA66             |
| ☞ Insulation material group   | I                |
| ☞ Contact material            | Copper alloy     |
| ☞ Contact plating             | Tin              |
| ☞ Color                       | Orange           |

## Technical data

|                                                 |                        |
|-------------------------------------------------|------------------------|
| ☞ IEC Rated Current                             | 10A                    |
| ☞ IEC Rated Voltage                             | 600V                   |
| ☞ Overvoltage category                          | III/III/ II            |
| ☞ Degree of pollution                           | 3 2 2                  |
| ☞ Rated impulse voltage                         | 3KV - -                |
| ☞ UL Rated Current                              | 10A - 10A              |
| ☞ UL Rated Voltage                              | 600V 600V -            |
| ☞ Conductor cross section rigid                 | 0.5-2.5mm <sup>2</sup> |
| ☞ Conductor cross section flexible              | 0.5-2.5mm <sup>2</sup> |
| ☞ Conductor cross section flexible,with furrule | 0.5-2.5mm <sup>2</sup> |
| ☞ Locking screw Specification                   | M3.5                   |
| ☞ Locking screw torque                          | 0.6-0.8N.m             |
| ☞ Fixed Screw Specification                     | -                      |
| ☞ Stripping length                              | 8~9mm                  |

## Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,  
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat