


Product Type: Transformer terminal

Product Name:620421

Product Description: Rated Voltage : 600V Rated
Current:32A Connection method : Screw
connection colour : grey

Product Size

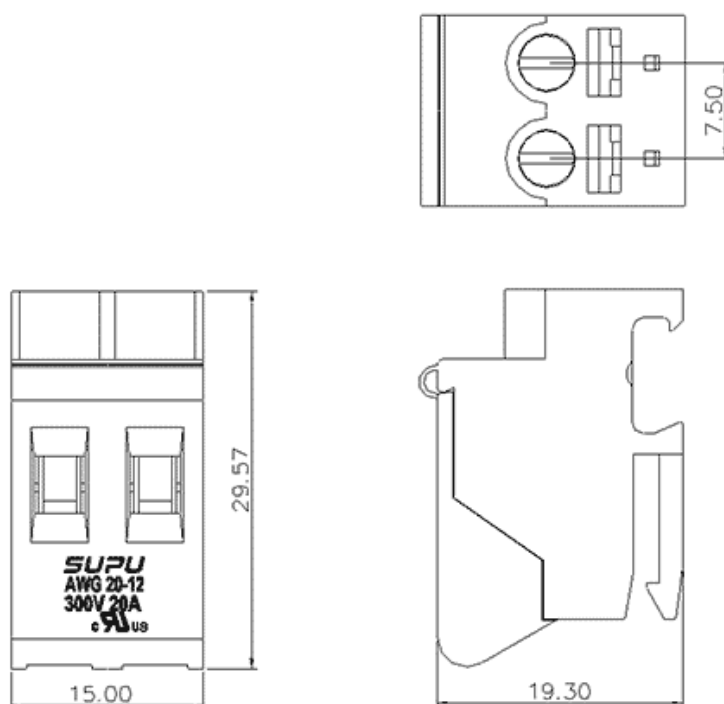

Parameters

 SUPU ID	620421
 Pitch	-
 Number of levels	single layer
 Number of connections	2

☞ Connection method	Screw connection
☞ Protection Level	IP20
☞ Operating temperature range	-40~+105°C
☞ Insulation material	PA66
☞ Insulation material group	I
☞ Contact material	Copper alloy
☞ Contact plating	Sn plated
☞ Color	Grey

Technical data

☞ IEC Rated Current	32A
☞ IEC Rated Voltage	600V
☞ Overvoltage category	III/III/ II
☞ Degree of pollution	3 2 2
☞ Rated impulse voltage	3KV - -
☞ UL Rated Current	20A 20A -
☞ UL Rated Voltage	300V 300V -
☞ Conductor cross section rigid	0.5-4mm ²
☞ Conductor cross section flexible	0.5-4mm ²
☞ Conductor cross section flexible,with furrule	0.5-4mm ²
☞ Locking screw Specification	M3.5
☞ Locking screw torque	0.8-0.96N.m
☞ Fixed Screw Specification	-
☞ Stripping length	8~9mm

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336



Wechat