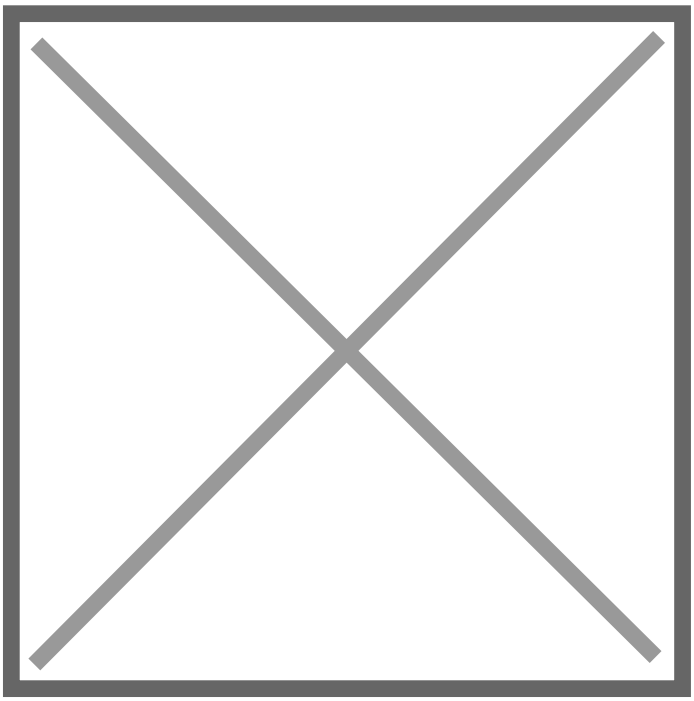

Product Type: Barrier terminal

Product Name:TB-C5-K-9.52H17C-50-001

Product Description: pitch：9.52mm,rated voltage IEC630V, rated current IEC32A, color: black, Rated cross section 22-12AWG

Product Size

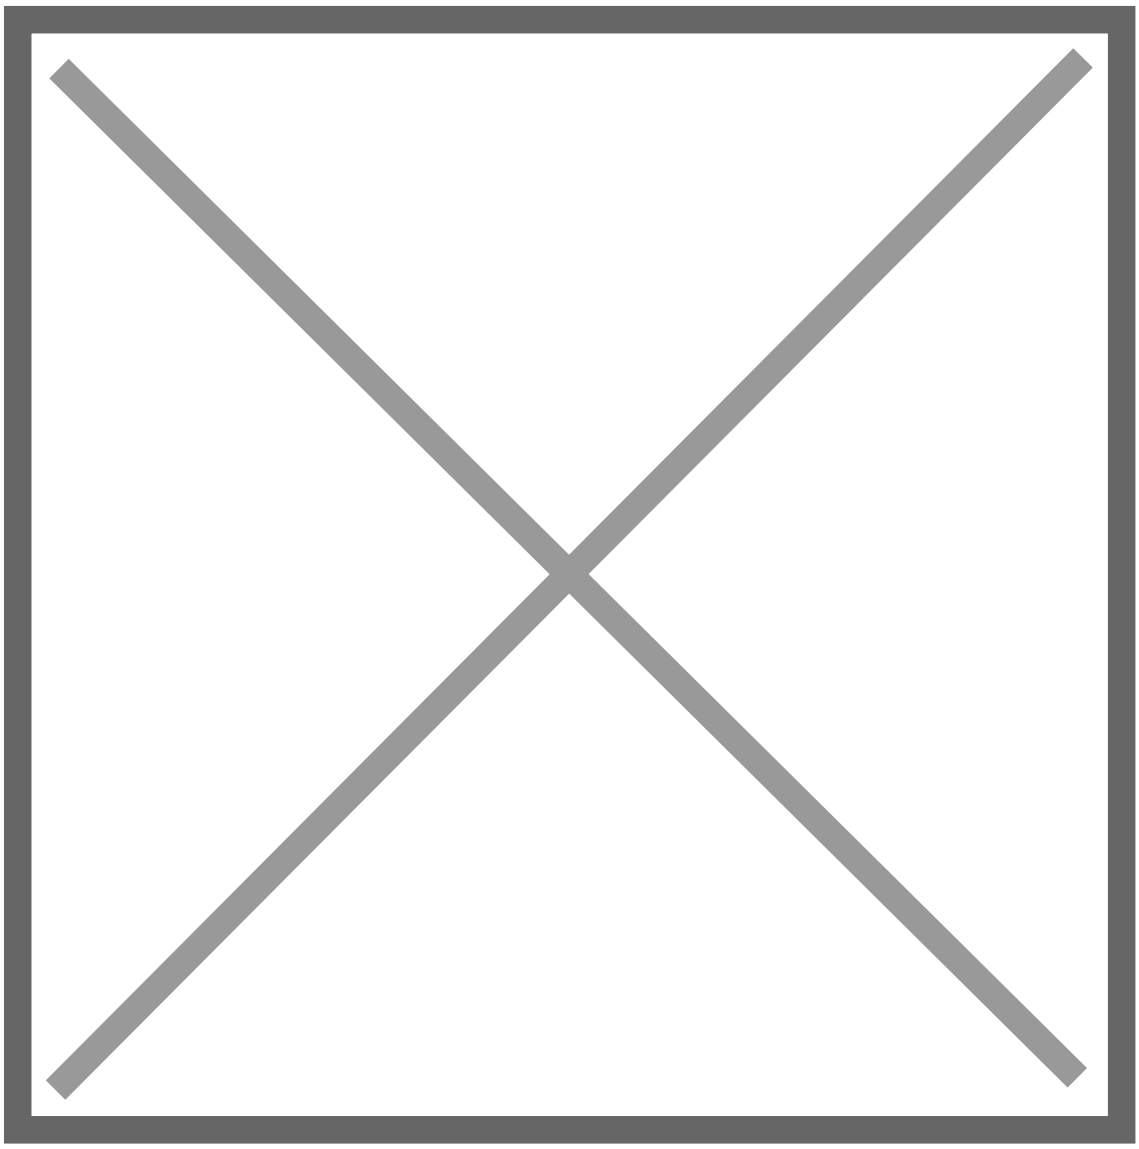

Parameters

SUPU ID	TB-C5-K-9.52H17C-50-001
Pitch	9.52
Number of levels	single layer
Number of connections	17
Connection method	Screw connection
Protection Level	IP20
Operating temperature range	-40°C ~+105°C
Insulation material	PA66

Insulation material group	I
Contact material	Copper alloy
Contact plating	Sn plated

Technical data

IEC Rated Current	32/32/32
IEC Rated Voltage	500/630/1000
Overvoltage category	III/III/ II
Degree of pollution	3/2/2
Rated impulse voltage	/
Conductor cross section rigid	0.5-4
Stripping length	8-9
Tightening torque	10.53
Connection capacity AWG	22-12
UL Rated Current	25/10
UL Rated Current	300/300

Commercial data

Order No	TB-C5-K-9.52H17C-50-001

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Ningbo SUPU Electronics Co., Ltd.

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

Wechat

The right to modify data belongs to SUPU.