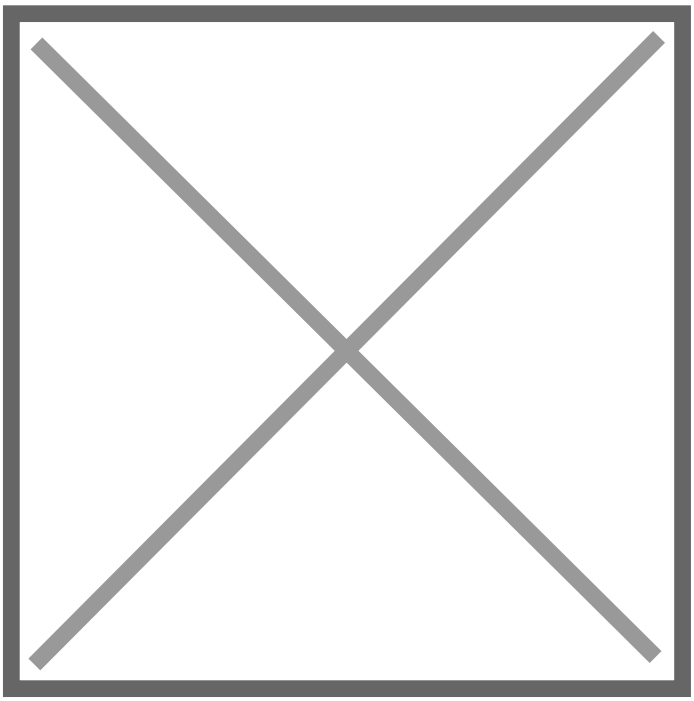

Product Type: Barrier terminal

Product Name:TB-K-21.0V14C-001

Product Description: pitch：21.0mm,rated voltage UL600V, rated current UL100A, color: black, Rated cross section10-2AWG

Product Size

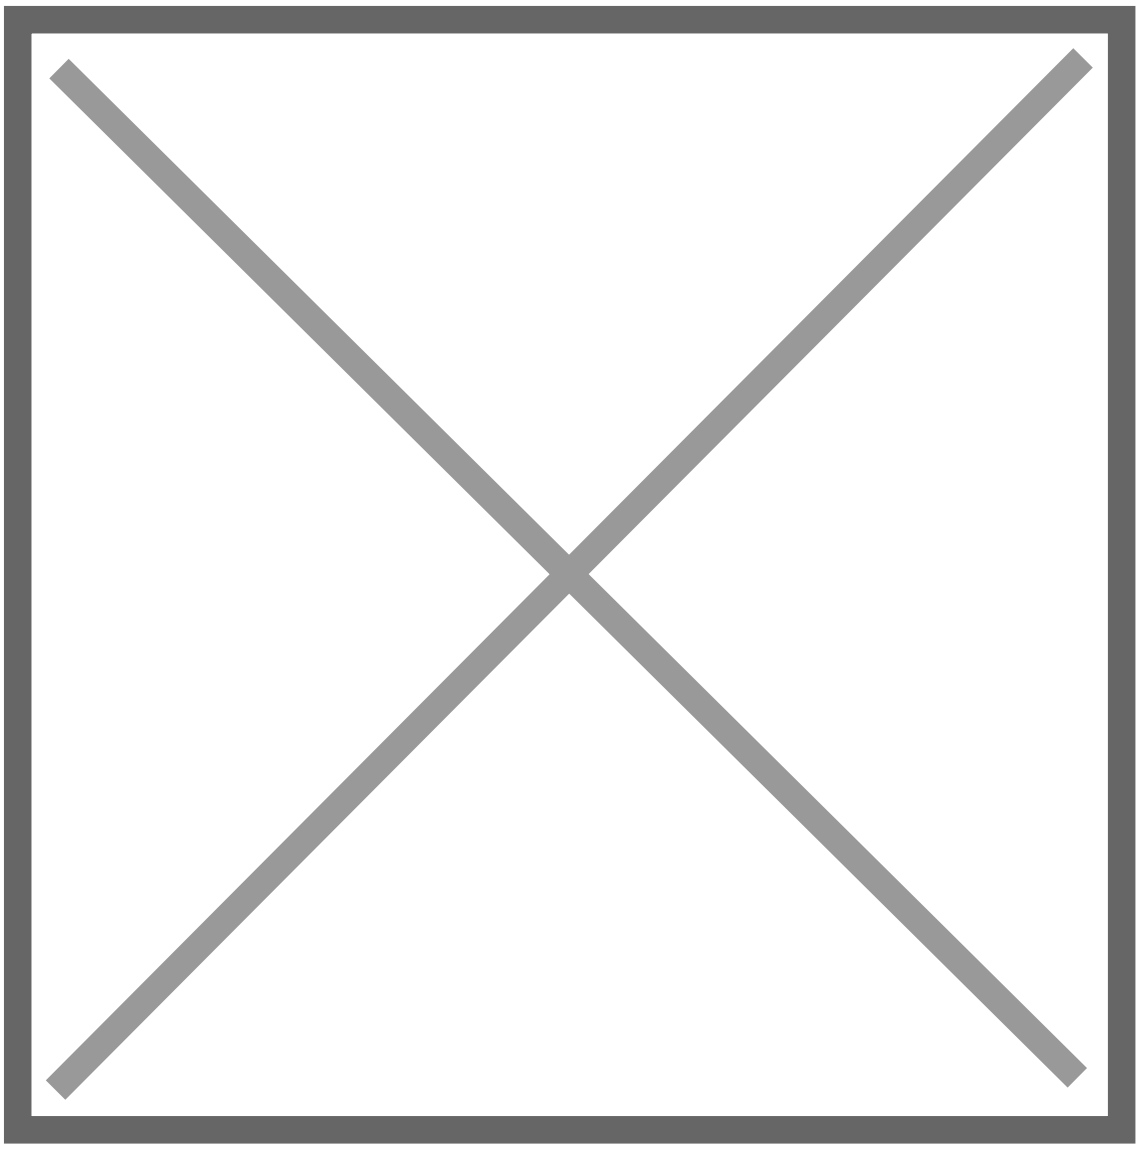

Parameters

SUPU ID	TB-K-21.0V14C-001
Pitch	21
Number of levels	single layer
Number of connections	14
Connection method	Screw connection
Protection Level	IP20
Operating temperature range	-30°C ~+120°C
Insulation material	PBT+GF

Insulation material group	III
Contact material	Copper alloy
Contact plating	Sn plated

Technical data

IEC Rated Current	100/100/100
IEC Rated Voltage	800/1000/1000
Overvoltage category	III/III/ II
Degree of pollution	3/2/2
Rated impulse voltage	/
Conductor cross section rigid	16-35
Stripping length	12-13
Tightening torque	44.27
Connection capacity AWG	10-2
UL Rated Current	100/100/5
UL Rated Current	600/600/600

Commercial data

Order No	TB-K-21.0V14C-001

Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,

Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Ningbo SUPU Electronics Co., Ltd.

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336

Wechat

The right to modify data belongs to SUPU.