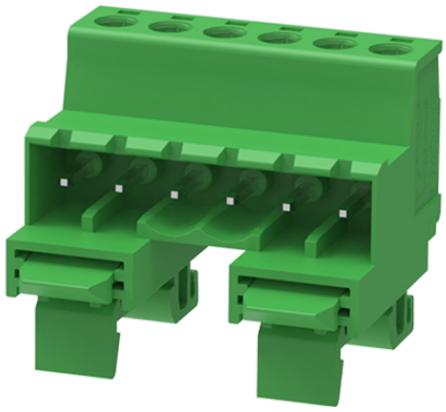

Product Type: Plug-in terminal-Socket

# Product Name:MC-PB5.08H12C-S-0001

Product Description: Pitch: 5.08mm Rated Voltage：320V Rated Current: 12A Connection method：Screw connection colour：customizable

## Product Size

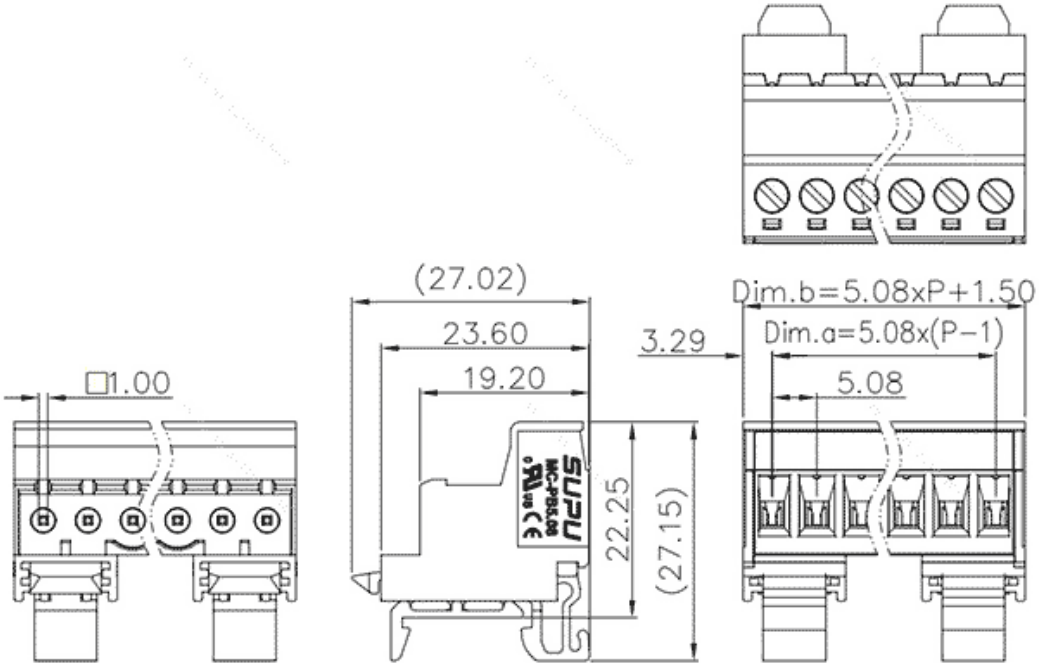


## Parameters

| | |
|---|---|
| SUPU ID | MC-PB5.08H12C-S-0001 |
| Pitch | 5.08 |
| Number of levels | Single layer |
| Number of connections | 12 |

| | |
|---|---|
| Connection method | Screw connection |
| Protection Level | IP20 |
| Operating temperature range | -40~+105°C |
| Insulation material | PA66 |
| Insulation material group | I |
| Contact material | Copper alloy |
| Contact plating | Sn,Plated |
| Color | Green/Black/Blue/Grey/Orange/Red |

## Technical data

| | |
|---|---|
| IEC Rated Current | 320V |
| IEC Rated Voltage | 12A |
| Overvoltage category | III III II |
| Degree of pollution | 3 2 2 |
| Rated impulse voltage | 4.0KV 4.0KV 4.0KV |
| UL Rated Current | 10A - 10A |
| UL Rated Voltage | 300V - 300V |
| Conductor cross section rigid | 0.2-2.5mm² |
| Conductor cross section flexible | 0.2-2.5mm² |
| Conductor cross section flexible,with furrule | 0.2-2.5mm² |
| Locking screw Specification | M3 |
| Locking screw torque | 0.5N.m |
| Stripping length | 7-8mm |
| Use group | B/C/D |

| | |
|---|---|
| Rated cross section | 28~12AWG |

## Commercial data

| | |
|---|---|
| Order No | MC-PB5.08H12C-S-0001 |


### Ningbo SUPU Electronics Co., Ltd.

Address: No. 150, Xinxing 4th Road, High-tech Industrial Development Zone,
Cixi City, Zhejiang Province, China

Zip code: 315303

Switchboard: +86 574-63288158

Fax: +86 574-63288170

E-mail:supucontact@supu.cn

Service Hotline: 400-626-6336


Wechat




The right to modify data belongs to SUPU.